













SEAMASTER

PLOPROF 1200M OMEGA CO-AXIAL 55 X 48 MM

Steel on steel

Caliber
8500

224.30.55.21.04.001

-  Co-Axial escapement
-  Si14 silicon balance spring
-  Automatic
-  Chronometer
-  Time zone function
-  Sapphire crystal
-  Anti-reflective treatment on both sides
-  Screw-in crown
-  Helium escape valve
-  Water-Resistant to a relative pressure of 120 bar (1200 metres/4000 feet)



WATCH FUNCTIONS

The crown has 3 positions:


1. Normal position (wearing position): when the crown is positioned against the case, the crown ensures that the watch is water-resistant.

Occasional winding: if the watch has not been worn for 60 hours or more, wind it up with the crown in position 1.

2. Setting the time zone and correcting the date: pull the crown out to position 2. Turn the crown forwards or backwards, and the hour hand will move forwards or backwards by 1-hour intervals. By passing the hour hand over midnight, the date can be changed forwards or backwards. Push the crown back to position 1.

NB: when changing the time zone backwards, it is necessary to move the hour hand back past 7 pm to ensure the date changes.

3. Time setting: hours – minutes – seconds. Pull the crown out to position 3. The seconds hand will stop. Turn the crown forwards or backwards. Synchronise the seconds by pushing the crown back to position 1 to coincide with a given time signal.

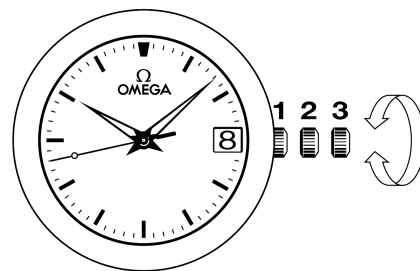

AUTOMATIC HELIUM ESCAPE VALVE


Your watch is equipped with an automatic helium escape valve, no manipulation is required.

PLOPROF BEZEL AND CROWN

Using the rotating bezel (fig. 4): keep the pusher A pressed down to turn the bezel.


Using the crown (fig. 4): the crown B must be unscrewed before it can be used, when the crown protection C will slide without turning. After use, push the crown to position 1, then press and screw the crown down again (to ensure the water resistance of the case).

Note: the crown is located at 9 o'clock, but its functions are identical to the crown normally placed at 3 o'clock.

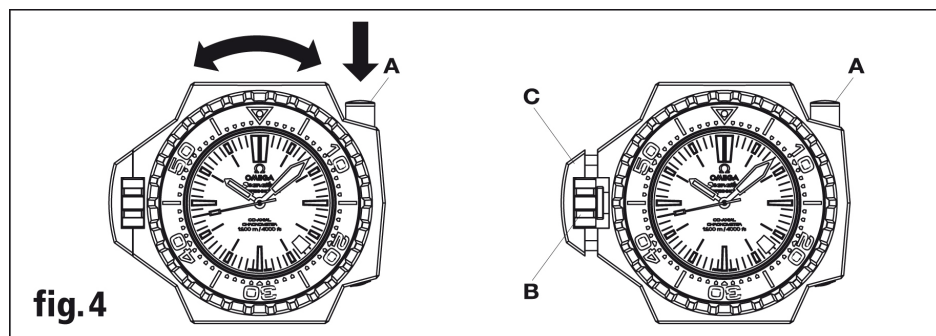

FOLDOVER CLASPS

Using the fine length adjuster (fig. 5)

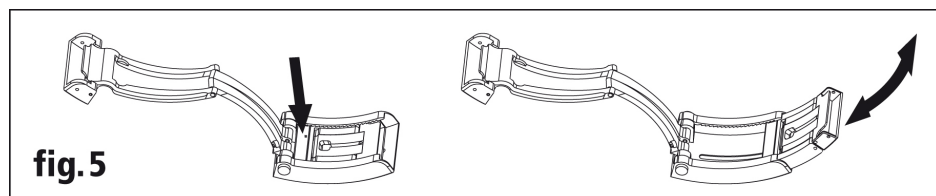

Using the diving extension (fig. 6)

Note: to fold the diving extension away, it is important to proceed according to fig. 6.2 (with the diving extension perpendicular to the cover of the clasp).

